


REV	DESCRIPTION	DATE	BY
A	INITIAL RELEASE	1/27/2026	RBHANDARI

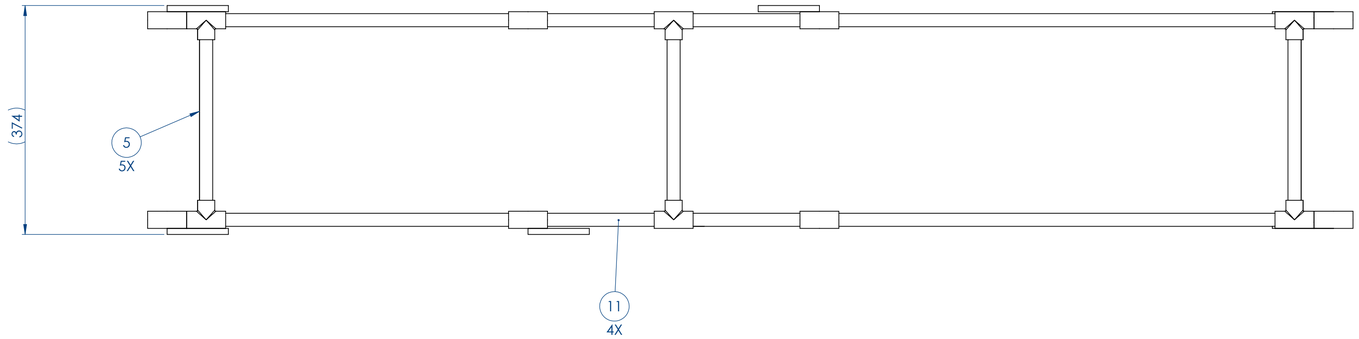

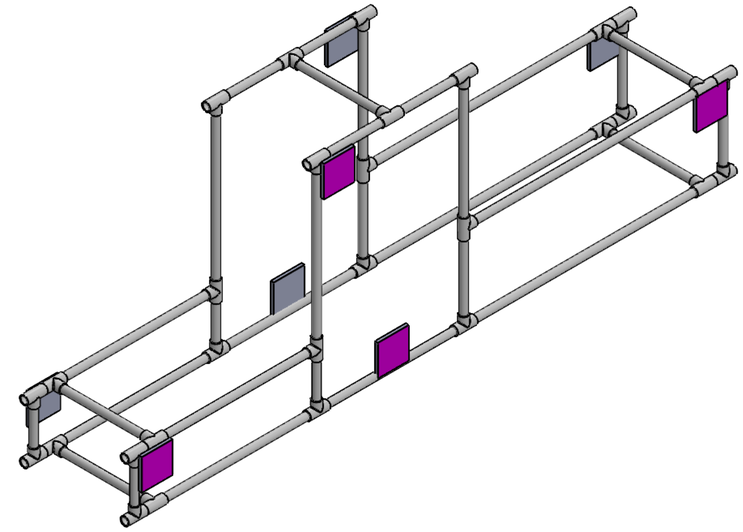

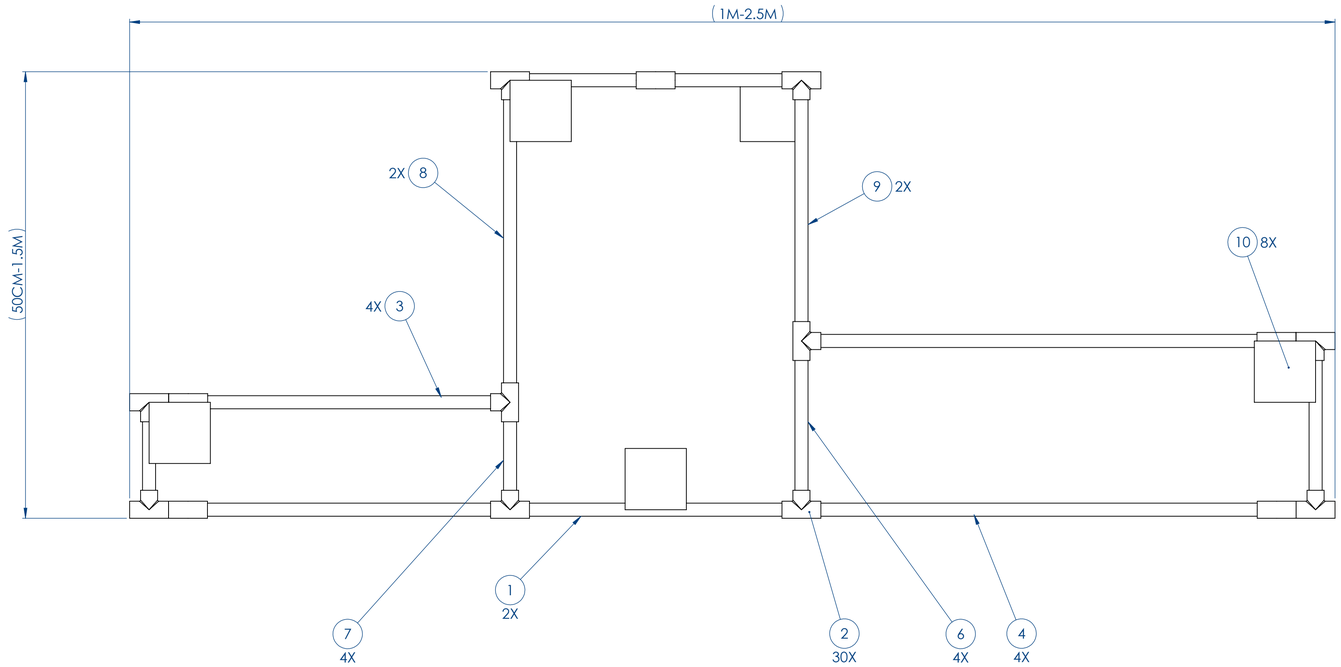

ITEM NO.	DESCRIPTION	QTY
11	PVC PIPE 0.5IN x 21CM LONG SCH 40	4
10	CORRUGATED PLASTIC SHEET 10 X 10 CM	8
9	PVC PIPE 0.5IN X VARIABLE LENGTH	2
8	PVC PIPE 0.5IN x VARIABLE LENGTH	2
7	PVC PIPE 0.5IN x 15CM LONG SCH 40	4
6	PVC PIPE 0.5IN x 25CM LONG SCH 40	4
5	PVC PIPE 0.5IN x 30CM LONG SCH 40	5
4	PVC PIPE 0.5IN x VARIABLE LENGTH	4
3	PVC PIPE 0.5IN X VARIABLE LENGTH	4
2	PVC TEE FOR 0.5 IN PIPE	30
1	PVC PIPE 0.5IN x 45CM LONG SCH 40	2

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION OF OCEANEERING INTERNATIONAL INC. AND MARINE TECHNOLOGY SOCIETY/MATE AND SHALL NOT BE DISCLOSED, DUPLICATED, REPRODUCED OR USED, IN WHOLE OR IN PART, FOR ANY PURPOSE OTHER THAN TO EVALUATE THIS DOCUMENT WITHOUT WRITTEN CONSENT OF OCEANEERING INTERNATIONAL, INC. AND MARINE TECHNOLOGY SOCIETY/MATE

- ALL DIMENSIONS ARE IN MM.
- DIMENSIONS IN [] ARE IN INCHES.

DRAWN BY: RBHANDARI | DATE: 1/27/2026

THIRD ANGLE PROJECTION

TITLE:
CORAL GARDEN
TASK 1.2

SHEET SIZE: A1 | SCALE: NTS | SHEET: 1 OF 1 | REV: A

3. SECURE ITEM (10) USING TAPPING SCREWS TO THE STRUCTURE
2. ENGAGEMENT BETWEEN PIPE FITTINGS IS APPROXIMATELLY 19 MM
1. CUT PIPE TO LENGTH DESCRIBED ON BILL OF MATERIALS

NOTES:

Task1.2_CoralGarden REV A